


N=Number of poles

Dim.L	(N-1) × 3.0+3.0
Dim.B	(N-1) × 3.0

POLES	DIM B	DIM L
1P	/	+/-0.10
2P	+/-0.10	+/-0.15
3P	+/-0.20	+/-0.20

TOLERANCE

PCB LAYOUT

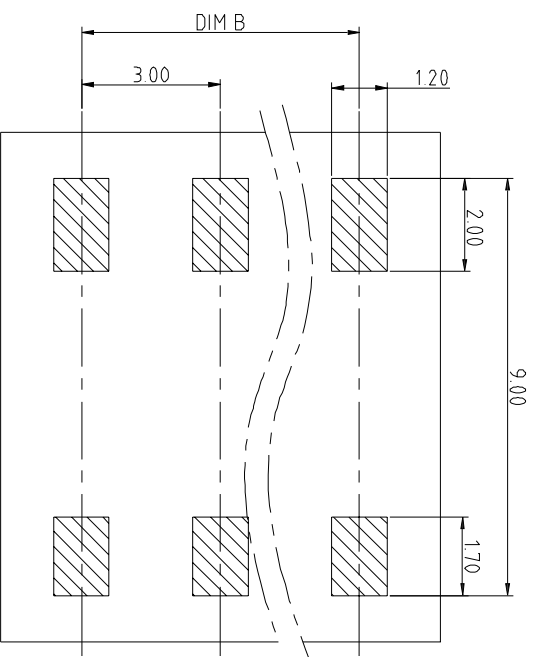

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

RoHS compliant
Unit: mm



File No.: E198287

Scale	Free
TOLERANCE	
X.	±0.50
X.X	±0.30
X.XX	±0.10
DIM	TOL
X.°	±1°
Angle	TOL

①	Add the UL File No.	①	Id.
②	Add the color of insulator	②	Modification
③	Drawn	③	Date
			Name

	Drawn	13.12.2016	Winnie
	Approved	11.04.2018	Winnie

Customer-No.	
ASSMANN WSW-No.	AWBR-300-xx-SR2
Drawing-No.	ASS 7431 CO
Replace	rev02
Sheet	



- Material**
- Item ③ Spring: PHBZ, Matte Tin plated over Nickel plated
 - Item ④ Body: LCP (UL 94V-0) Natural color
 - Electrical: UL(1977)
 - Voltage rating: 150V
 - Current rating: 3A
 - Wire range:
 - Solid wire(AWG): 22-26
 - Wire strip length: 5-6mm
 - Withstanding Voltage: 1.3KV
 - Operating Temperature: -40°C to +130°C
 - Reflow Soldering temperature: 260°C/10 Sec max
 - Safety Approval:
 - Packing: tape reel