


OPTION A

NOTES:


- MATERIAL:
HOUSING: POLYESTER(PBT), GLASS FILLED, UL94 V-0,
COLOR: BLACK
TERMINAL: PHOSPHOR BRONZE
- FINISH:
30 GOLD: 0.76 MICROMETERS/30 MICRONS MINIMUM GOLD IN
1.91 MICROMETERS/75 MICRONS MINIMUM TIN
OVER NICKEL UNDERPLATE OVERALL
- TO BE USED WITH 28 AWG STRANDED WIRE WITH (1.35)/.053
DIAMETER MAXIMUM INSULATION
- SEE TABLE FOR AVAILABLE CIRCUIT SIZES
- STANDARD PACKAGING PER PK-70873-0001. OPTIONAL PACKAGING
MAY BE AVAILABLE, REQUEST DRAWING PK-70400
- PARTS STACKABLE END TO END ON (2.54)/.100 CENTERS
- PRODUCT SPECIFICATION: PS-70400
- SEE DRAWING SDA-70400-**** (SHEET 3) FOR OPTIONAL
HOUSING DETAILS
- 4 CIRCUIT SHOWN
- TO MATE WITH MOLEX 2.54/.100 CENTERLINE HEADERS
- 2 CIRCUIT ASSEMBLIES SUPPLIED AS GROUPED PAIRS



CIRCUIT NO. 1
SLOT OR ARROW

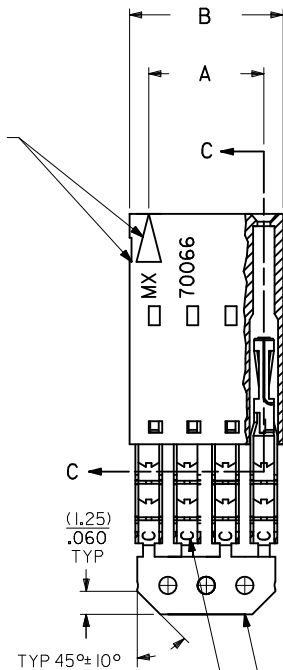

SECTION C-C

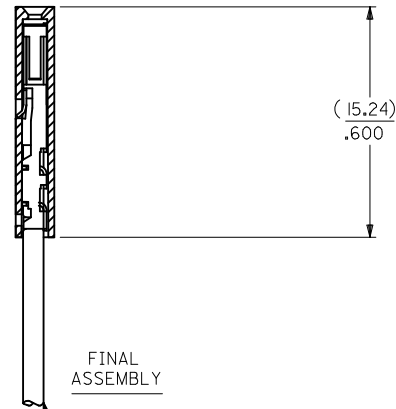

WIRE (SEE NOTE 3)

CKT. SIZE	A	B	EDP. NO.
2	(2.54) .100	(5.05) .199	14-56-3022
3	(5.08) .200	(7.59) .299	14-56-3032
4	(7.62) .300	(10.13) .399	14-56-3042
5	(10.16) .400	(12.67) .499	14-56-3052
6	(12.70) .500	(15.21) .599	14-56-3062
7	(15.24) .600	(17.75) .699	14-56-3072
8	(17.78) .700	(20.29) .799	14-56-3082
9	(20.32) .800	(22.83) .899	14-56-3092
10	(22.86) .900	(25.37) .999	14-56-3102
11	(25.54) 1.000	(27.91) 1.099	14-56-3112
12	(27.94) 1.100	(30.45) 1.199	14-56-3122
13	(30.48) 1.200	(32.99) 1.299	14-56-3132
14	(33.02) 1.300	(35.53) 1.399	14-56-3142
15	(35.56) 1.400	(38.07) 1.499	14-56-3152
16	(38.01) 1.500	(40.61) 1.599	14-56-3162
17	(40.64) 1.600	(43.15) 1.699	14-56-3172
18	(43.18) 1.700	(45.69) 1.799	14-56-3182
19	(45.72) 1.800	(48.23) 1.899	14-56-3192
20	(48.26) 1.900	(50.77) 1.999	14-56-3202
21	(50.80) 2.000	(53.31) 2.099	14-56-3212
22	(53.34) 2.100	(55.85) 2.199	14-56-3222
23	(55.88) 2.200	(58.39) 2.299	14-56-3232
24	(58.42) 2.300	(60.93) 2.399	14-56-3242
25	(60.96) 2.400	(63.47) 2.499	14-56-3252

I.D. SLOT CODE TO WIRE GAUGE CHART	
I.D. SLOT CODE	WIRE GAUGE
C	28 AWG.

PLATING CODE (STRIPE ON CARRIER STRIP)	
PLATING	COLOR
30 GOLD	RED

REMOVE ENG NO. EC NO: UCP2011-110 DRW:MSI BARRA 2010/10/19 CHKD:J MORGAN 2010/10/19 APPR:SMILLER 2010/11/24	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .01 1 PLACE ± 0.35 ± --- ANGULAR ± 1/2°	DIMENSION STYLE MM/IN	SCALE	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
			DRAWN BY MSI BARRA	DATE 2010/10/20	TITLE ASSEMBLY, SL CONNECTOR SINGLE ROW 2.54/.100 GRID	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY SMILLER	DATE 2010/11/24	MATERIAL NO. SEE TABLE		DOCUMENT NO. SDA-70400-1401-1424
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						SHEET NO. 1 OF 1