



Features:


- Constant Current Design
- Universal AC input/ Full Range
- Built-in Active PFC function, PF 0.98 Typical
- High Efficiency (Up to 89%)
- Output Protections: OVP/SCP/OTP
- Lightning Protection
- Class 2 Power Unit (See Note)
- Waterproof (IP67)
- 5 Year Warranty




| Model | PLC-050S035 | PLC-050S045 | PLC-050S070 | PLC-050S110 | PLC-050S140 | PLC-050S175 | PLC-050S210 | PLC-050S280 | PLC-050S330 | PLC-050S420 |
|--|--|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Output Characteristics | | | | | | | | | | |
| Rated Current <small>See Note</small> | 0.35A (1) | 0.45A (1) | 0.70A (1) | 1.10A (2) | 1.40A (3) | 1.75A (3) | 2.10A (3) | 2.80A (3) | 3.30A (1) | 4.20A (1) |
| Voltage Range | 47~142V | 37~110V | 24~72V | 16~48V | 12~36V | 10~29V | 8~24V | 6~18V | 5~15V | 4~12V |
| Ripple and Noise (max) <small>Note 1</small> | ±10% Vo | | | | | | | | | |
| Voltage Accuracy | ±5% Vo | | | | | | | | | |
| Line Regulation | ±1% Vo | | | | | | | | | |
| Load Regulation | ±3% Vo | | | | | | | | | |
| Rise Time | 20mS Max @ Rated Load | | | | | | | | | |
| Hold-up Time (Typ.) | 8.5mS Min (110VAC input, full load), 10mS Min (220VAC input, full load) | | | | | | | | | |
| Input Characteristics | | | | | | | | | | |
| Voltage Range | 90VAC~305VAC | | | | | | | | | |
| Frequency Range | 47Hz-63Hz | | | | | | | | | |
| Power Factor (Typical) | 110VAC | >0.98 | >0.98 | >0.98 | >0.98 | >0.98 | >0.98 | >0.98 | >0.98 | >0.98 |
| | 220VAC | >0.92 | >0.92 | >0.92 | >0.92 | >0.92 | >0.92 | >0.92 | >0.92 | >0.92 |
| Efficiency (Typical) | | 89% | 88% | 87% | 87% | 87% | 87% | 86% | 84% | 83% |
| AC Current (max) | 0.8A @ 100-277VAC Input Full Load | | | | | | | | | |
| Inrush Current (max) | 65A @ 230VAC, 25°C | | | | | | | | | |
| Leakage Current | 0.5mA max @ 277VAC | | | | | | | | | |
| Protection | | | | | | | | | | |
| Over Temperature (OTP) | 110°C (Temperature of internal components); shut down, auto recover after the temperature decreases | | | | | | | | | |
| Over Voltage (OVP) <small>Note 2</small> | 1.2~1.4Vo | | | | | | | | | |
| Short Circuit (SCP) | Long-term mode, auto recovery | | | | | | | | | |
| Environmental Characteristics | | | | | | | | | | |
| Operating Temperature | -35°C~70°C | | | | | | | | | |
| Operating Relative Humidity | 10% RH to 100% RH | | | | | | | | | |
| Storage Temperature | -40°C~85°C, 5% to 100% RH non-condensing | | | | | | | | | |
| Vibration | 10 to 300Hz sweep at constant acceleration of 1.0G(Breadth: 3.5mm) for 1 Hour for each of the perpendicular axes X, Y, Z | | | | | | | | | |
| Waterproof Rating | IP67 | | | | | | | | | |
| Safety Standards | UL8750, Compliance to UL1012 UL935, IEC61347 | | | | | | | | | |
| Withstand Voltage | L/N-GND: 4kV, L-N: 2kV | | | | | | | | | |
| Isolation Resistance | I/P-O/P: >100M Ohms / 500VDC / 25°C / 70% RH | | | | | | | | | |
| EMC Emission | Compliance to EN55022(CISPR22) Class B, EN61000-3-2 Class A, EN61000-3-3 | | | | | | | | | |
| EMC Immunity | Compliance to EN61000-3-2, 3 EN61000-4-2, 3, 4, 5, 6, 8, 11, EN61547 | | | | | | | | | |
| Characteristics | | | | | | | | | | |
| Life Time | More than 50,000Hrs (25°C, 80% Load) | | | | | | | | | |
| MTBF (MIL-HDBK-217F) | More than 490,000Hrs (25°C, 80% Load) | | | | | | | | | |
| Dimension (LxWxH) | 199x42.5x34mm | | | | | | | | | |
| Note | 1. Ripple & Noise: Measured by 20 MHz bandwidth oscilloscope and the output paralleled with a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor. 2. Latch Mode: The power supply shall return to normal operation only after the power is turned on again (1) Non-Class 2 output (USR & CNR) (2) Class 2 output (USR); Non-Class 2 output (CNR) (3) Class 2 output (USR & CNR) | | | | | | | | | |

MECHANICAL SPECIFICATIONS

UNIT: mm

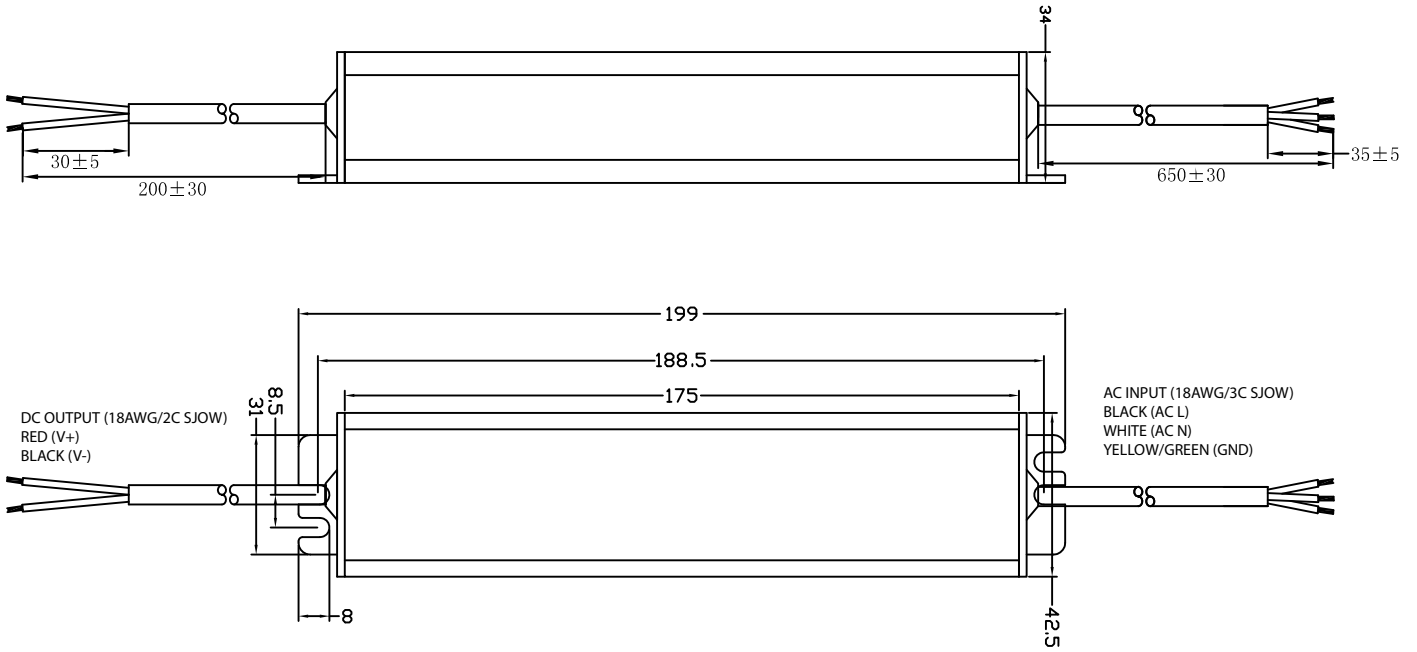

Derating Curve

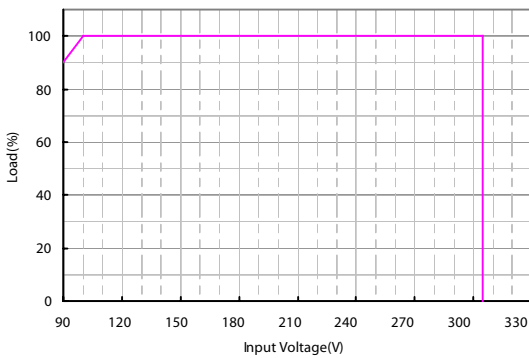

Ambient Temperature vs. Load

