



LED CURRENT DIAGRAM
1116353-7 ONLY
OBSOLETE

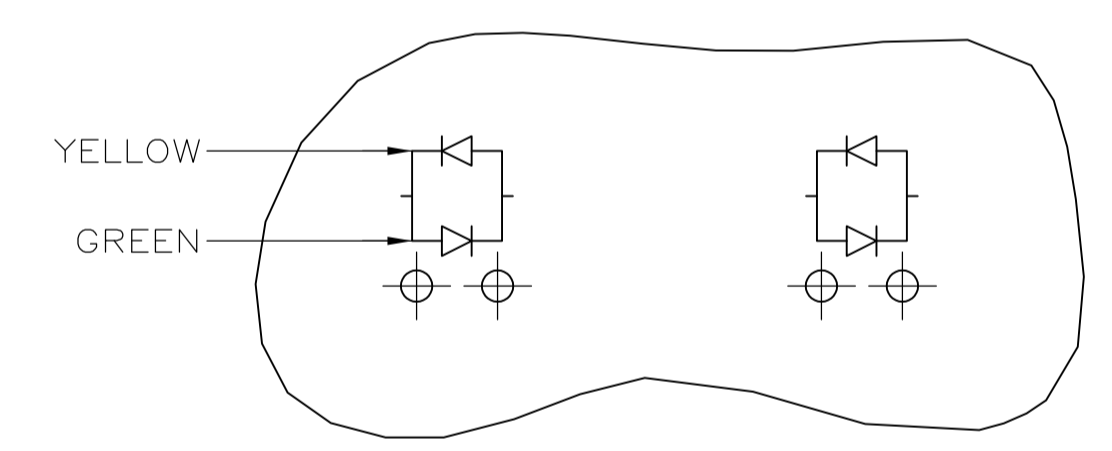


LED CURRENT DIAGRAM
1116353-8 ONLY

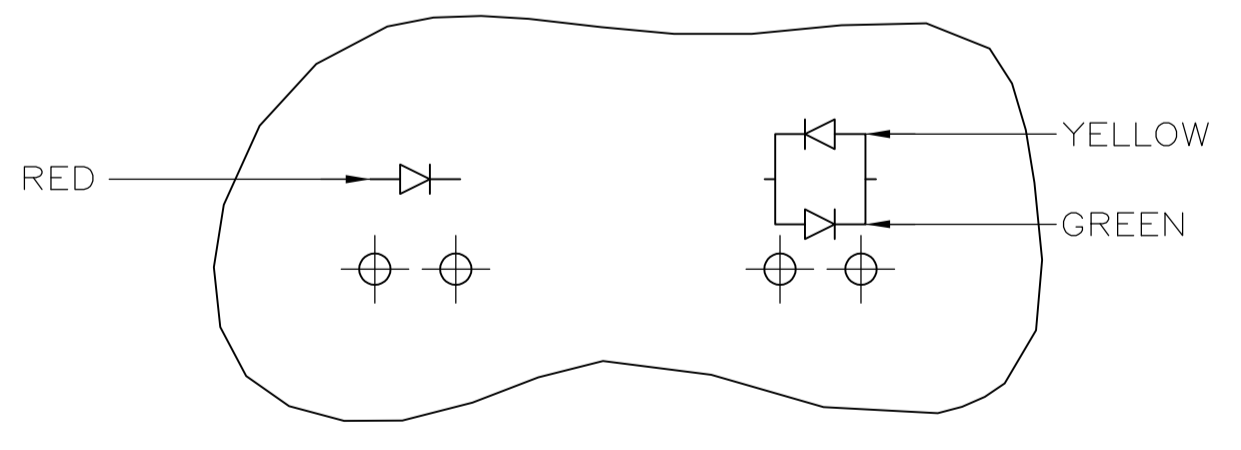

LED CURRENT DIAGRAM
2-1116353-3 ONLY
SUPERSEDED

- MATERIAL:
HOUSING - HIGH TEMPERATURE THERMOPLASTIC, COLOR: BLACK, UL94V-0
TERMINALS - 0.36[.014] THICK PHOS BRONZE PLATED WITH 3.81µm[.000150] MIN THICK BRIGHT TIN LEAD IN SOLDER AREA, 1.27µm[.000050] MIN GOLD IN LOCALIZED PLATE AREA. ENTIRE TERMINAL PLATED WITH 1.27µm[.000050] MIN THICK NICKEL.
SHIELD - 0.196[.0077] THICK COPPER ZINC ALLOY PREPLATED WITH 1.27µm[.000050] MIN SATIN NICKEL WITH 2.03µm[.000080] MIN TIN POST DIPPED ON PCB GROUND TABS
LIGHT EMITTING DIODE (LED) - DIFFUSED EPOXY LENS, 0.51 X 0.51[.020 X .020] CARBON STEEL WIREFRAME LEADS PLATED WITH 8.89µm[.000350] TIN/COPPER OVER 2.03µm[.000080] SILVER OVER 1.02µm[.000040] NICKEL UNDERPLATE OVER 2.03µm[.000080] COPPER UNDERPLATE
 - JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
- △ SUGGESTED PANEL OPENING DIMENSIONS.
 △ SUGGESTED CLEARANCE BETWEEN TOP OF CONNECTOR AND TOP PANEL OPENING.
 △ SEE TABLE FOR COLOR OF LEDS AND NUMBER REQUIRED.
 6. THIS MODULAR JACK WITH INTEGRATED LED IS NOT IR REFLOW SOLDERING PROCESS COMPATIBLE.
 △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 △ MANUFACTURING DATE CODE:
 LOCATED APPROX. AS SHOWN.
 FIRST 2 DIGITS= LAST 2 DIGITS OF YEAR.
 NEXT 2 DIGITS= MANUFACTURING WORK WEEK.
 LAST DIGIT= DAY OF WEEK WITH SUNDAY=1.

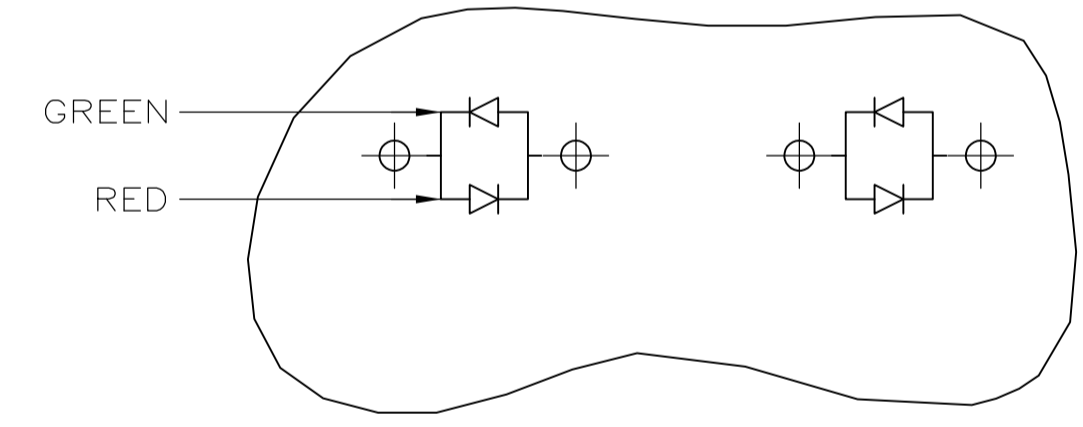

LED CURRENT DIAGRAM
1-1116353-3 ONLY
SUPERSEDED
BY
1-6116353-3

POSITION 2	POSITION 1	PART NUMBER
△ SUPERSEDED BY 2-6116353-8	3.05 [.120]	YELLOW/GREEN
△ SUPERSEDED BY 2-6116353-4	3.05 [.120]	GREEN
△ SUPERSEDED	2.54 [.100]	RED
△ SUPERSEDED BY 1-6116353-3	2.54 [.100]	RED/GREEN
△ OBSOLETE	2.54 [.100]	YELLOW/GREEN
△ OBSOLETE	2.54 [.100]	ORANGE/GREEN
△ OBSOLETE	2.54 [.100]	YELLOW
△ OBSOLETE	2.54 [.100]	GREEN
△ OBSOLETE	2.54 [.100]	GREEN
△ OBSOLETE	2.54 [.100]	YELLOW
△ SUPERSEDED BY 6116353-2	2.54 [.100]	GREEN
△ SUPERSEDED BY 6116353-2	2.54 [.100]	GREEN

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT
(COMPONENT SIDE)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± 0.25[.010]
 3 PLC ± -
 4 PLC ± -
 ANGLES ± -

MATERIAL: SEE NOTE 1

FINISH: SEE NOTE 1

WEIGHT: -

SCALE: 4:1

SHEET 1 OF 1

REV G2

THIS DRAWING IS A CONTROLLED DOCUMENT. DLD/L.A.MAYER 090CT2007
 CIK J.WESTMAN 090CT2007
 APVD S.FLICKINGER 090CT2007
 NAME INVERTED MODULAR JACK ASSEMBLY, 1X2, SHIELDED, PANEL GROUNDS WITH LEDS

PRODUCT SPEC: 108-1163-4
 APPLICATION SPEC: 114-2154

SIZE: A1
 CAGE CODE: 00779
 DRAWING NO: 1116353

RESTRICTED TO: -

CUSTOMER DRAWING