


- Electrical test:**
- 1. 100% short, open, miss wire test
 - 2. Conduct resistance: 2 Ohm(max)
 - 3. Insulation resistance: 5Mohm(min)
 - 4. Dielectric test: DC 300V

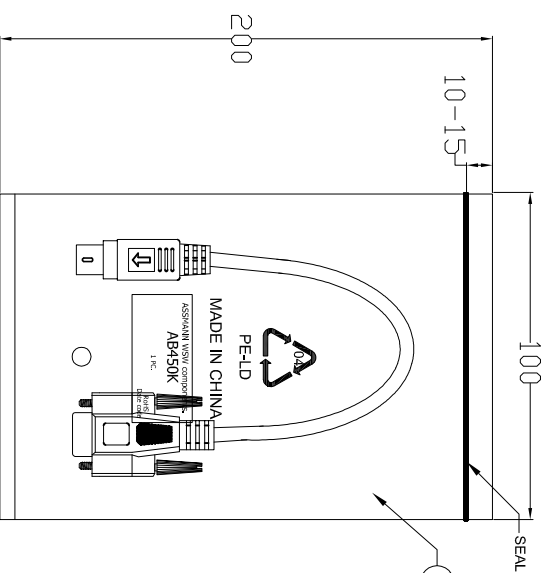

PIN ASSIGNMENT

P1	_____	P2	_____
1	_____	2	_____
2	_____	3	_____
3.5	_____	5	_____
4	_____	7	_____
SHELL	_____	SHELL	_____

⑧	TUBE	23mm	HEAT SHRINK TUBE BLACK 001.5*1.1-15mm.L2=8mm
⑧	PE BAG	1/10	CLEAR SIZE:230*300*0.05mm PRINT BLACK*MADE IN CHINA*+*10PCS*.
⑦	PE BAG	1	CLEAR SIZE:100*200*0.05mm PRINT BLACK*MADE IN CHINA*+*1PC*.
⑥	SCREW	2	SCREW:#4-40UNC D-E L32.5mm,NICKEL PLATED,INSULATION COLOR BEIGE(V-29)
⑤	OUT JACKET	25.5g	BEIGE(V-29) 40P PVC
④	IN JACKET	8g	CLEAR LDPE
③	CONN	1	DB 9PIN FEMALE PIN G/F SHELL-NICKEL SOLDER TYPE INSULATION COLOR BLACK
②	CONN	1	MINI DIN 6P/M PIN G/F SHELL-NICKEL SOLDER TYPE INSULATION COLOR BLACK
①	CABLE	1	NOUL 28AWG*4C+D+W+AL/NY JACKET:BEIGE(V-29) ODS.0mm L=150±5mm
	NO.	NAME	Q'TY
			SPECIFICATION

1PCS/PE BAG

RoHS compliant

Unit: mm

Scale	Free	Tolerance	Free
TOLERANCE			
DIM	TOL	Angle	TOL
DRAWN		DATE	
APPROVED		NAME	
DATE		NAME	
DATE		NAME	
DATE		NAME	

①	Drawn	20.02.2017	Amy
	Modification		

Customer-No.	ASSMANN WSW-No.	AB450K
Drawing-No.	ASS 7885 CA	
Replace	rev00	

ASSMANN
components

1 2 3 4 5 6 7

H G F E D C B A