



DIMENSIONS:	
A	2.500" ±0.063
B	2.750" ±0.125
C	3.060" ±0.063
D	2.000" ±0.063
E	1.688" ±0.063
G	0.203" x 0.375" ±0.015

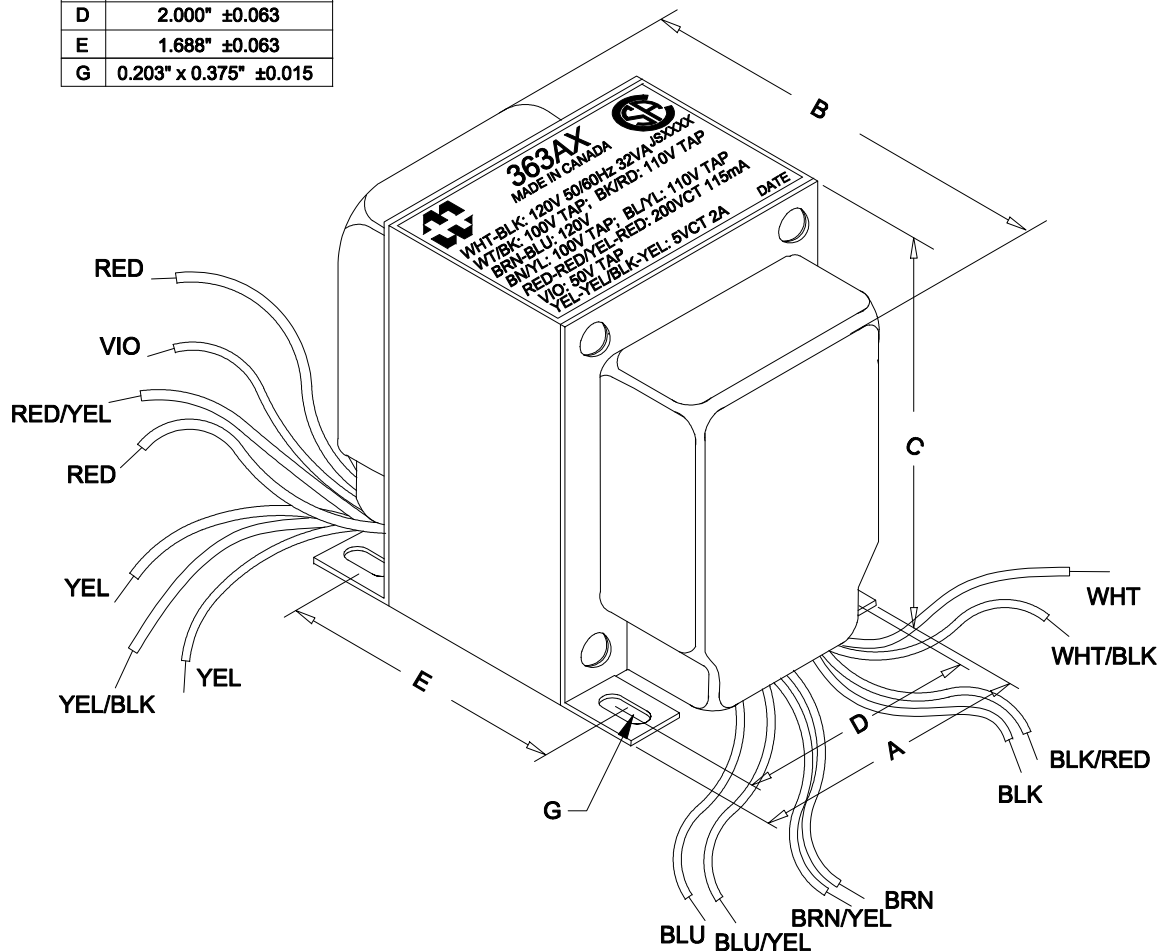

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5"

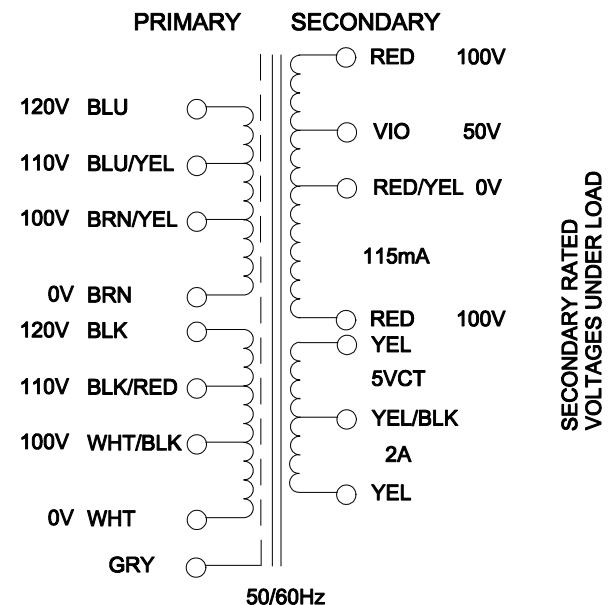

GRY - ELECTROSTATIC SHIELD

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 120V, 60Hz, WHT - BLK	80mA Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK	
	RED - RED =	212.7V ±2%
	RED - RED/YEL = RED/YEL - RED =	106.4V ±2%
	RED/YEL - VIO =	50.06V ±2%
	YEL - YEL =	5.455V ±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.727V ±2%
DCR	@ 20°C, WHT - BLK =	19.45 Ω ±20%
	@ 20°C, BRN - BLU =	21.36 Ω ±20%
	@ 20°C, RED - RED =	53.93 Ω ±20%
	@ 20°C, YEL - YEL =	0.117 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION	
0	RELEASED. C.I.	08/07/12	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5	
			PH # (519) 886-6181	DWG. NO. 363AX
			FAX # (519) 886-9540	
			TITLE: POWER TRANSFORMER	
			DWG. BY: C. ILIE	
			DATE: 08/07/12	
			CHK'D BY:	
			APP'D. BY:	
			DIMENSIONS: IN(X) MM()	