
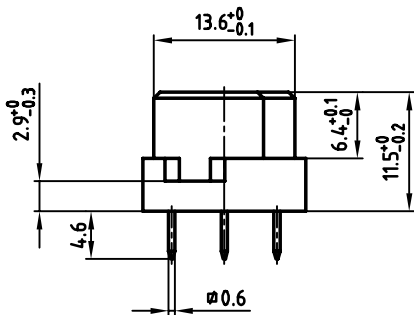


used for: DIN EN 60603 TYPE "E"


SEE NOTE 3

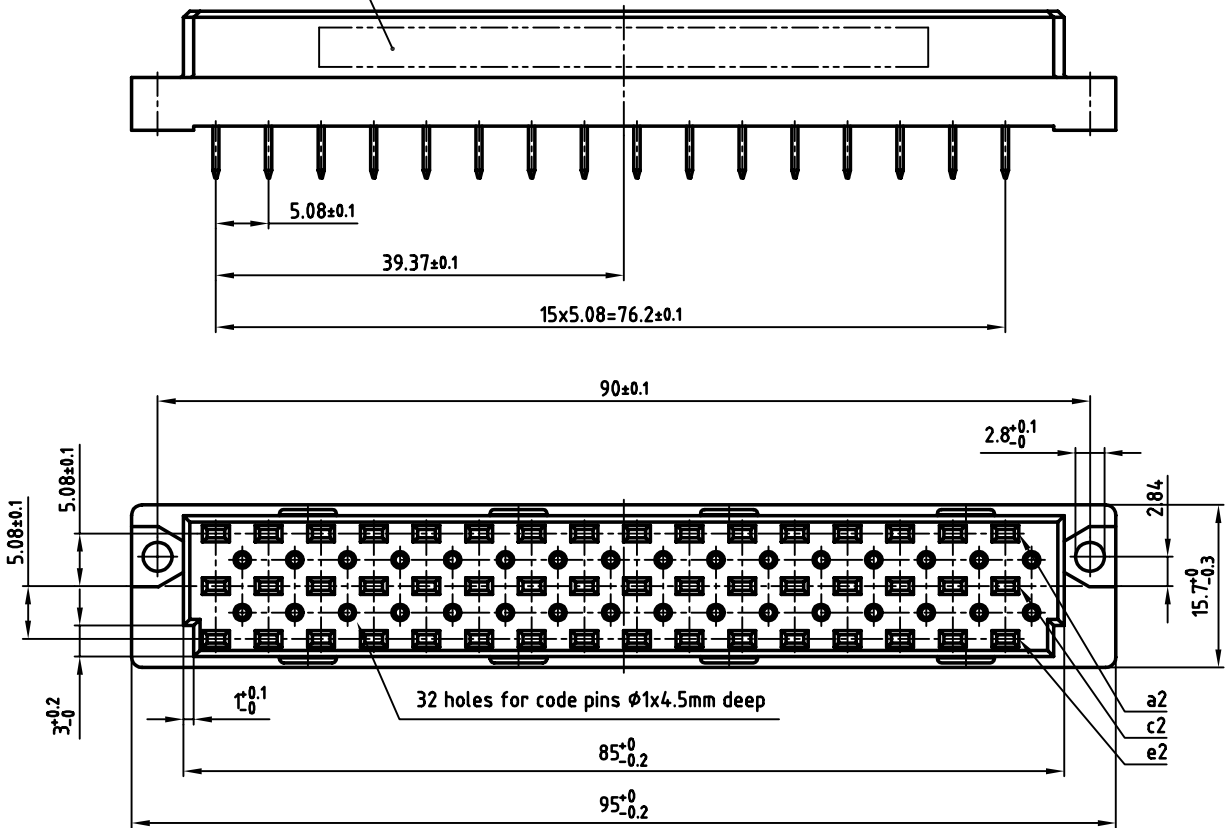

NOTES:

1. INSULATORS: PBTP UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 122A13119X CONEC Y/WW

P.C.B. HOLE DRILLINGS

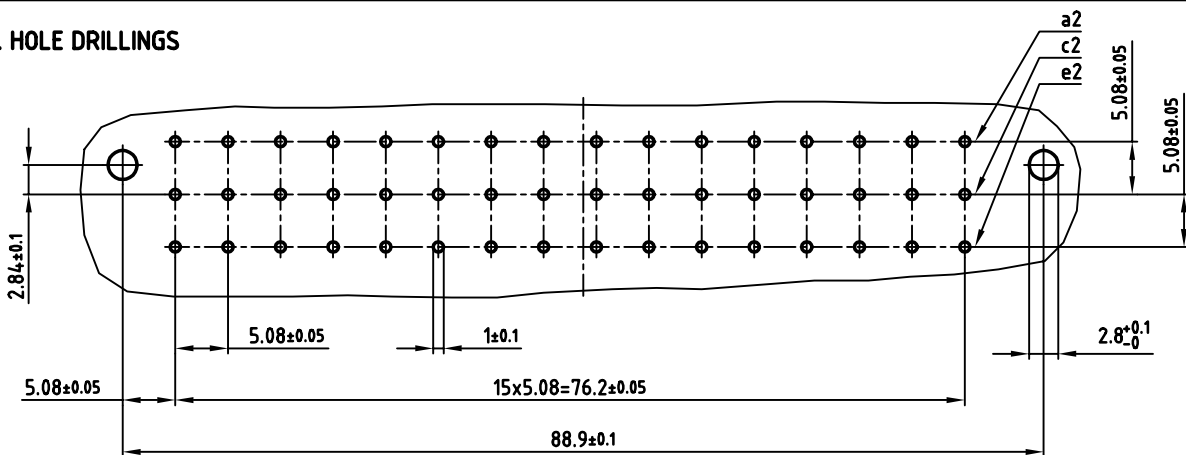

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		dim. in mm
2003		date
drawn	03.04.	Parei
appd.	03.04.	Labus
norm	DIN EN 60603	
d-old		
CONEC		

scale: 2:1

material: SEE NOTES

title: **FEMALE CONNECTOR TYPE "E"**
48pos. SOLDER PIN

dwg no: AutoCAD 2000 DIN-A

12K1A250 3

part no: 122A13119X sh: 1/1