THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - , - .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS

2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD LAT AGAINST THE PRINTED CIRCUIT BOARD

3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING

4. POINT OF MEASUREMENT FOR PLATING THICKNESS

5. PARTS PACKAGED IN GPAX

6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

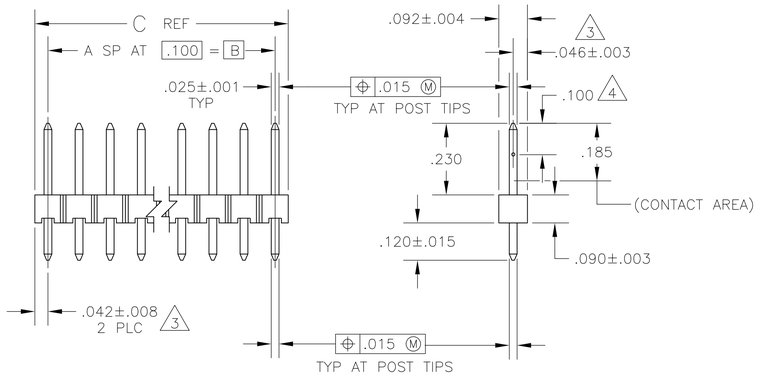



RECOMMENDED HOLE LAYOUT

	C	B	A	NO OF POSN	PART NUMBER
5 6 OBSOLETE	.284	.200	2	3	4-103239-2
OBSOLETE 6	3.984	3.900	39	40	4-103239-0
	3.884	3.800	38	39	3-103239-9
	3.784	3.700	37	38	3-103239-8
	3.684	3.600	36	37	3-103239-7
	3.584	3.500	35	36	3-103239-6
	3.484	3.400	34	35	3-103239-5
	3.384	3.300	33	34	3-103239-4
	3.284	3.200	32	33	3-103239-3
	3.184	3.100	31	32	3-103239-2
	3.084	3.000	30	31	3-103239-1
	2.984	2.900	29	30	3-103239-0
	2.884	2.800	28	29	2-103239-9
	2.784	2.700	27	28	2-103239-8
	2.684	2.600	26	27	2-103239-7
	2.584	2.500	25	26	2-103239-6
	2.484	2.400	24	25	2-103239-5
	2.384	2.300	23	24	2-103239-4
	2.284	2.200	22	23	2-103239-3
	2.184	2.100	21	22	2-103239-2
	2.084	2.000	20	21	2-103239-1
	1.984	1.900	19	20	2-103239-0
OBSOLETE 6	1.884	1.800	18	19	1-103239-9
	1.784	1.700	17	18	1-103239-8
	1.684	1.600	16	17	1-103239-7
	1.584	1.500	15	16	1-103239-6
	1.484	1.400	14	15	1-103239-5
	1.384	1.300	13	14	1-103239-4
6 SUPERSEDED BY 6-146281-3	1.284	1.200	12	13	1-103239-3
	1.184	1.100	11	12	1-103239-2
6 OBSOLETE	1.084	1.000	10	11	1-103239-1
	.984	.900	9	10	1-103239-0
	.884	.800	8	9	103239-9
	.784	.700	7	8	103239-8
	.684	.600	6	7	103239-7
	.584	.500	5	6	103239-6
	.484	.400	4	5	103239-5
	.384	.300	3	4	103239-4
	.284	.200	2	3	103239-3
	.184	.100	1	2	103239-2
	.084	—	—	1	103239-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES, UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK
POSTS: PHOSPHOR BRONZE

FINISH POSTS: .000030 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL

DWN H MOLL 13OCT87
CHK T. CLARK 20OCT87
APVD T. CLARK 20OCT87

PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100CL, VERTICAL, WITH .025 SQUARE POSTS

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-103239 | RESTRICTED TO —

RESTRICTED CUSTOMER | SCALE 4:1 | SHEET 1 OF 1 | REV H2

4805 (3/11)