

# 3M™ Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

Electronic Solutions Division  
6801 River Place Blvd  
Austin, TX 78726  
<http://www.3Mconnectors.com>


Document No. : PS-0137  
Revision : A  
Revised Date : 8-May-2013  
Issued Date : 8-May-2013

---

---

## PRODUCT SPECIFICATION

# 3M Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

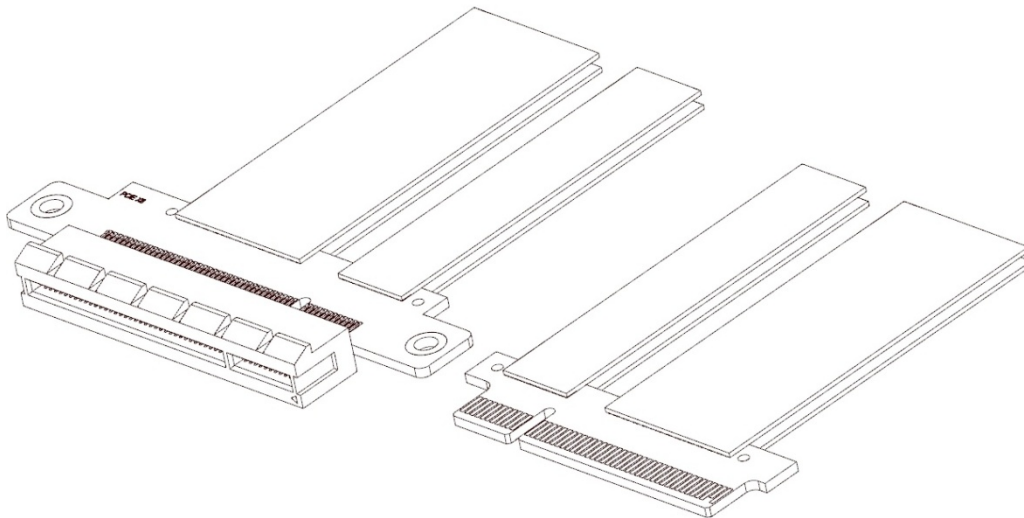

# 3M™ Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

Electronic Solutions Division  
6801 River Place Blvd  
Austin, TX 78726  
<http://www.3Mconnectors.com>

Document No. : **PS-0137**  
Revision : **A**  
Revised Date : **8-May-2013**  
Issued Date : **8-May-2013**

---

---

## Table of Contents

<u>Section</u>	<u>Content</u>	<u>Page</u>
	Cover page	1
	Contents	2
1.	Scope	3
1.1.	Content	3
2.	Applicable Documents	3
2.1.	Commercial Standards, Specifications and Report	3
3.	Requirements	3
3.1.	Design and Construction	3
3.2.	Materials	3
3.3.	Ratings	4
3.4.	Performance and Test Description	4
3.5.	Test Requirements and Procedures Summary	5 - 9

# 3M™ Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

Electronic Solutions Division  
6801 River Place Blvd  
Austin, TX 78726  
<http://www.3Mconnectors.com>

Document No. : **PS-0137**  
Revision : **A**  
Revised Date : **8-May-2013**  
Issued Date : **8-May-2013**

---

---

## 1. SCOPE

### 1.1. Content

This specification covers performance, tests and quality requirements for the 3M Twin Axial PCI Express Extender Cable Assembly, Series 8KXX.

## 2. APPLICABLE DOCUMENTS

The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, latest edition of the specification applies. In the event of conflict between requirements of this specification and product drawing, product drawing shall take precedence.

### 2.1. Commercial standards, specifications and report

- 2.1.1. EIA-364
- 2.1.2. PCI Express CEM r2.0
- 2.1.3. PCI Express Base r3.0

## 3. REQUIREMENTS

### 3.1. Design and Construction

Product shall be of design, construction and physical dimensions specified on applicable product drawing.

### 3.2. Materials

#### 3.2.1. Socket Connector

Material: High Temperature Thermoplastic  
Flammability: UL94V-0  
Lead-free contact plating finish  
Black color

#### 3.2.2. Paddlecard

Material: FR4  
Mating pad underplating: Min 50u" Ni  
Mating pad finish: Min 30u" Au

# 3M™ Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

Electronic Solutions Division  
6801 River Place Blvd  
Austin, TX 78726  
<http://www.3Mconnectors.com>

Document No. : **PS-0137**  
Revision : **A**  
Revised Date : **8-May-2013**  
Issued Date : **8-May-2013**

---

---

3.2.3. 3M™ High-Speed Twin Axial Ribbon Cable  
See related specification PS-0106 for ribbon twin axial cable material information.

### 3.3. Ratings

3.3.1. Current rating: 1.1 A/contact

3.3.2. Operating temperature: -20 to +80 deg C

### 3.4. Performance and Test Description

Product is designed to meet electrical, mechanical and environmental performance requirements specified in this specification. All tests are performed at ambient environmental conditions per EIA-364 unless otherwise specified.

The mated boardmount connector used in these tests was the Samtec PCI Express socket connector, series PCIe.

### 3.5. Test Requirements and Procedures Summary

# 3M™ Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

Electronic Solutions Division  
6801 River Place Blvd  
Austin, TX 78726  
<http://www.3Mconnectors.com>

Document No. : **PS-0137**  
Revision : **A**  
Revised Date : **8-May-2013**  
Issued Date : **8-May-2013**

---

---

<b>ELECTRICAL</b>		
<b>Test Description</b>	<b>Test Condition</b>	<b>Requirement</b>
Withstanding voltage	Subject mated connector with a voltage of 500VDC for 1.0 minute between adjacent terminals. Per EIA-364-20	No Breakdown
Insulation resistance	Subject mated connector with a voltage of 500VDC between adjacent terminals. Per EIA-364-21	1000 M Ohms min
Differential Trace Propagation delay	Per PCI Express CEM r2.0 section 4.6.9	< 750ps
Intra-pair skew (within pair)	Per PCI Express CEM r2.0 section 5.3.2, Table 5.2	< 5 ps

## 3M™ Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

Electronic Solutions Division  
6801 River Place Blvd  
Austin, TX 78726  
<http://www.3Mconnectors.com>

Document No. : PS-0137  
Revision : A  
Revised Date : 8-May-2013  
Issued Date : 8-May-2013

<b>SIGNAL INTEGRITY</b>		
<b>Test Description</b>	<b>Test Condition</b>	<b>Requirement</b>
Impedance, mated cable assembly	Risetime of 70 ps (20/80%)	85 Ohms nominal
Differential insertion loss, SDD21	¼, ½ & 1 meter assemblies measured over frequency range 50 MHz to 7.5 GHz described in the <i>PCI Express Connector High Speed Electrical Test Procedure</i> .	> -1.0 dB up to 0.10 GHz > -3.0 dB up to 1.0 GHz > -7.0 dB up to 4.0 GHz > -14.0 dB up to 7.5 GHz
Differential return loss, SDD22	¼, ½ & 1 meter assemblies measured over frequency range 50 MHz to 4.0 GHz per PCI Express Base r3.0, Section 4.3.3.11 described in the <i>PCI Express Connector High Speed Electrical Test Procedure</i> .	< -10 dB up to 1.25 GHz < -8 dB up to 2.5 GHz < -4 dB up to 4.0 GHz
Near End Crosstalk	¼, ½ & 1 meter assemblies measured over frequency range 50 MHz to 7.5 GHz. Total NEXT calculated as described in the <i>PCI Express Connector High Speed Electrical Test Procedure</i> document.	< -32 dB up to 2.5 GHz < -26 dB up to 5 GHz < -20 dB up to 7.5 GHz
Far End Crosstalk	¼, ½, & 1 meter assemblies measured over frequency range 50 MHz to 7.5 GHz. Total NEXT calculated as described in the <i>PCI Express Connector High-Speed Electrical Test Procedure</i> document.	< -32 dB up to 2.5 GHz < -26 dB up to 5 GHz < -20 dB up to 7.5 GHz

# 3M™ Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

Electronic Solutions Division  
 6801 River Place Blvd  
 Austin, TX 78726  
<http://www.3Mconnectors.com>

Document No. : **PS-0137**  
 Revision : **A**  
 Revised Date : **8-May-2013**  
 Issued Date : **8-May-2013**

<b>MECHANICAL</b>		
<b>Test Description</b>	<b>Test Condition</b>	<b>Requirement</b>
Static (one-time) fold	Bend Radius: 1.0 mm Bend Types: 45°, 90°, 180° (flat fold)	Meets signal integrity specifications (impedance, s- parameters) after a one-time 1 mm minimum bend radius fold
Visual and Dimensional Inspections	Visual, dimensional, and functional per applicable quality inspection plan according to EIA 364-18	Product shall meet requirements of applicable product drawing.
Contact current rating (Mated)	The sample size is a minimum of three mated connectors. The sample shall be soldered on a PC board with the appropriate footprint. Conduct a temperature rise vs. current test, according to EIA 364-70 method 2	1.1 A per pin minimum. The temperature rise above ambient shall not exceed 30 °C. The ambient condition is still air at 25C.
Insertion Force	Measure the force necessary to mate the connector assemblies at a maximum rate of 12.5 mm (0.492 inches) per minute, using a steel gauge 1.70 mm thick with a tolerance + 0.00, - .01 mm according to EIA-364-13	1.15 N Maximum per contact pair
Removal Force	Measure the force necessary to mate the connector assemblies at a maximum rate of 12.5 mm (0.492 inches) per minute, using a steel gauge 1.70 mm thick with a tolerance + 0.00, - .01 mm according to EIA-364-13	0.15 N Minimum per contact pair

# 3M™ Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

Electronic Solutions Division  
6801 River Place Blvd  
Austin, TX 78726  
<http://www.3Mconnectors.com>

Document No. : **PS-0137**  
Revision : **A**  
Revised Date : **8-May-2013**  
Issued Date : **8-May-2013**

---

---

<b>ENVIRONMENTAL</b>		
<b>Test Description</b>	<b>Test Condition</b>	<b>Requirement</b>
Solderability	Steam age 1hr. Solder time to be 5+/-05 seconds at 245°C, using non-activated flux. Per EIA-364-638	90% of immersed area must show no voids and pin holes.
Resistance to Solder Heats	Place connector on applicable P.C.B footprint and float on solder bath at 260°C±5°C for 10±2 seconds.	Appearance: No damage



# 3M™ Twin Axial PCI Express Extender Cable Assembly, Series 8KXX

Electronic Solutions Division  
6801 River Place Blvd  
Austin, TX 78726  
<http://www.3Mconnectors.com>

Document No. : **PS-0137**  
Revision : **A**  
Revised Date : **8-May-2013**  
Issued Date : **8-May-2013**

---

---

## **RoHS Compliance Statement**

“RoHS 2011/65/EU” means that the product or part does not contain any of the substances in excess of the maximum concentration values (“MCVs”) in EU RoHS Directive 2011/65/EU. The MCVs are by weight in homogeneous materials. This information represents 3M’s knowledge and belief, which may be based in whole or in part on information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M’s Regulatory Information Appendix, then 3M’s entire liability and Buyer’s exclusive remedy will be in accordance with the Warranty stated below.

Unless otherwise stated by 3M in writing, this information represents 3M’s knowledge and belief based on information provided by third party suppliers to 3M.

3M is a trademark of 3M Company. All other trademarks are owned by their respective companies.

## **Important Notice**

All statements, technical information, and recommendations related to 3M’s products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M’s current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Unless otherwise noted, references to industry specifications are intended to indicate substantial compliance to the material elements of the specification. Such references should not be construed as a guarantee of compliance to all requirements in a given specification.

## **Warranty; Limited Remedy; Limited Liability**

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M’s option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

© 3M 2013. All rights reserved.